

WI-FI PROGRAMMABLE THERMOSTAT 230V




TECHNOLOGY
CONNECTS **EFFICIENCY**



The new **PERRY** CR029WIFI 230V is a simple and functional product.

Backlit LCD display: all information always available at glance

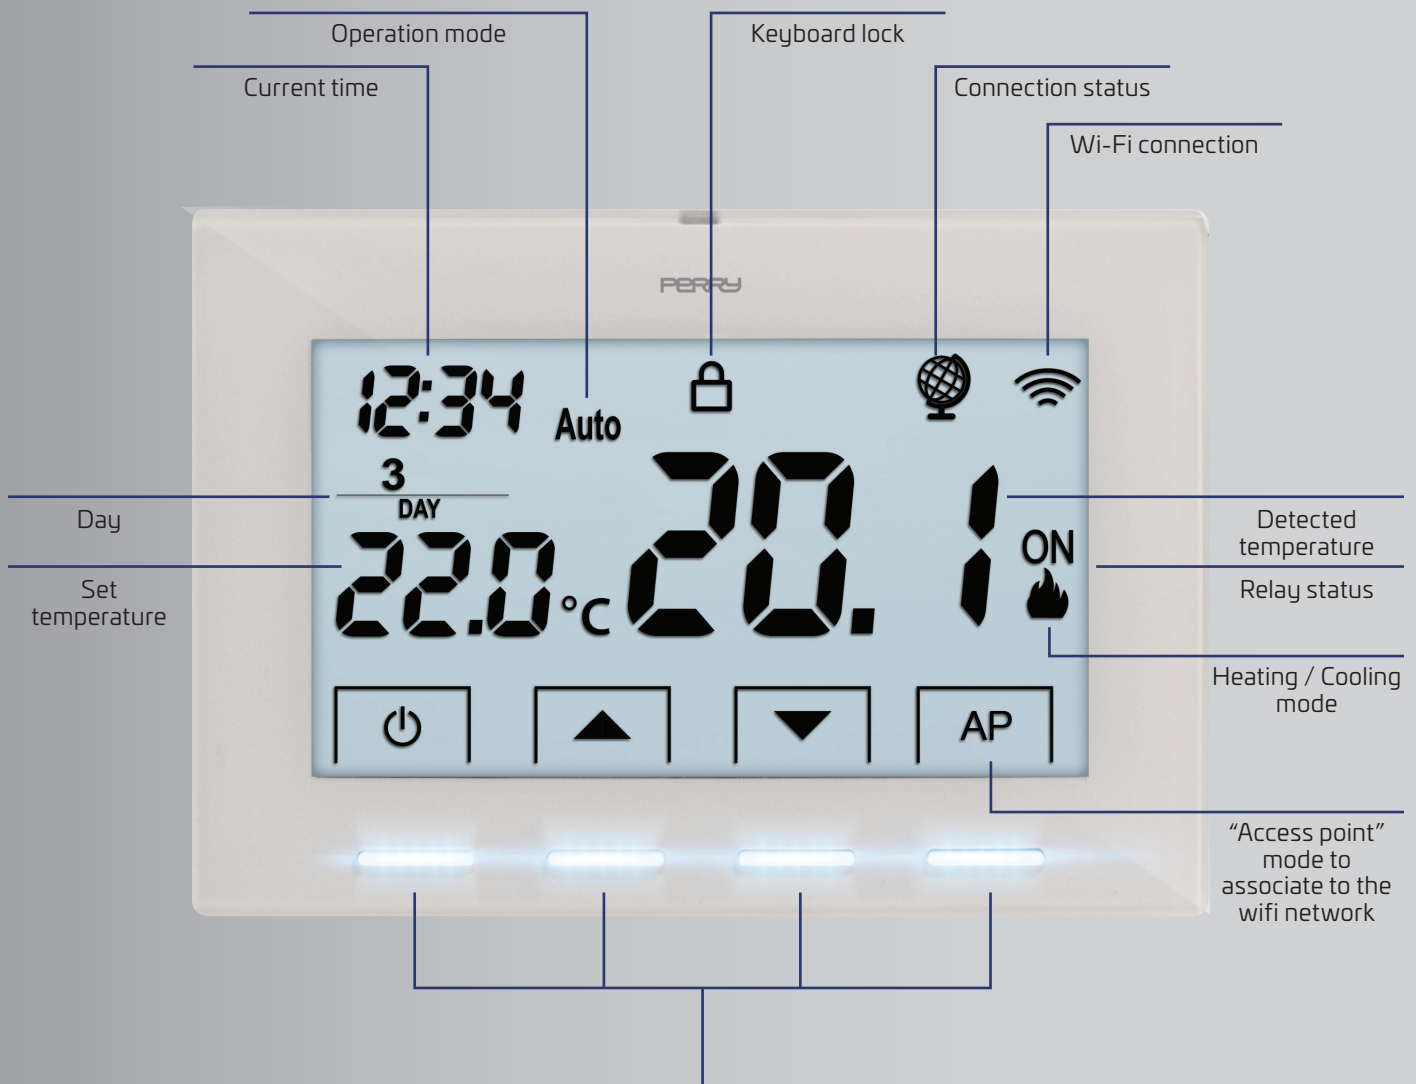

Keys lit in different colors depending on set temperature

● Below 18,0 °C the keys light up in green, indicating low consumption

● Between 18,1 °C and 21 °C the keys light up in blue, indicating optimal consumption

● Above 21,1 °C the keys light up in red, indicating consumption over needs



The App makes the programmable thermostat more complete, performing and your installation more efficient. **Wherever you are.**

Programmable by smartphone or tablet grants the maximum flexibility of use.

MULTI-INSTALLATION / MULTI-ZONE MANAGEMENT

To manage multiple devices in a home or in different systems.




TEMPERATURE SETTING

Simple and intuitive.



WEEKLY PROGRAMMING

Up to 10 levels of temperature per day.

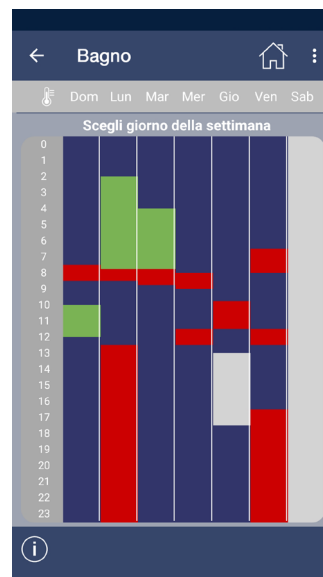

VOICE ASSISTANTS

The new Perry Wi-fi programmable thermostat supports Alexa and Google Home. From now on, it will be easy to manage the home temperature.



EASY TO INSTALL

The new programmable thermostat CRO29WIFI simplifies the installation and configuration operations. Using the Perry APP the parameters of time, date and time programming synchronize in few seconds.




ADVANCED SETTINGS

Temperature locks, offset, regulation for floor or traditional installation.




GEOLOCATION

It allows, depending on the positions of the tenants, to lower or raise the temperature. It guarantees a considerable energy consumption.

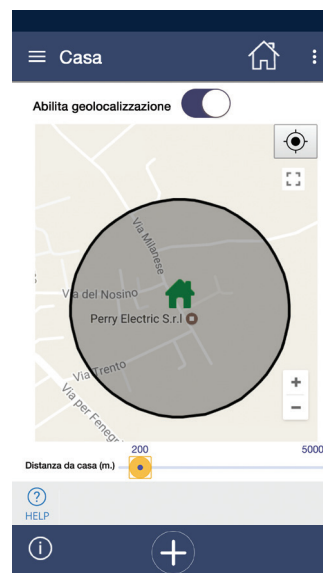

SHARING

App  allows sharing the devices with other users (with setting limits). Function particularly useful in the family or in rented homes.





230V

ITX CR029WIFI - 230V

Wi-fi programmable thermostat 230V, white color



Wi-Fi



230V



Daily programming



App



Geolocation



Sharing devices

TECHNICAL SPECIFICATIONS

Power supply	230V - 50Hz
Output	1 potential free changeover contact: 5(3)A/250Vc.a.
Display	4.3" backlit LCD
Backlighting	programmable: timed / fixed ON / fixed OFF
Buttons	backlit buttons with color in function
Working mode	ON / OFF operation with adjustable differential switch 0.2 - 1.2°C or modulating with control period from 7 to 20 minutes
Programming	weekly up to 10 daily programs with minimum intervention 1 minute
Commands and operations settable by App	Summer / Winter control Holiday Program (energy saving) Limescale pump activation program Offset (correction value) of the measured temperature Minimum and maximum temperature setting lock Geolocation settable up to 5 km
Daylight saving time change	yes
Regulation	temperature setting of 0.1° C from 4 to 37° C
Mounting	wall
Keyboard lock	yes
Dimensions (LxWxH)	128.5 x 88.5 x 26 mm

Voice commands




ITX CR028WIFIKIT - 3V batteries


kit made by 1 Wi-fi programmable thermostat ITX CR028WIF + 1 Smartbox ITX RX01WIFI

- POWER SUPPLY 3V BATTERY
- GEOLOCATION
- ENERGY CONSUMPTION CONTROL
- VOICE COMMANDS
- BACKLIT DISPLAY

Voice commands



Boiler



WI-FI Programmable thermostat




868 MHz



Smartbox




ETHERNET



Router



INTERNET



PERRY ELECTRIC s.r.l.
Via Milanese, 11
22070 Veniano - CO - ITALY
T. +39 031 8944.1
www.perry.it - export@perry.it



DPCRPE021 EN