
EFFICIENCY AND SAFETY IN ONE PRODUCT



WITH MOTION DETECTOR



LED LIGHT

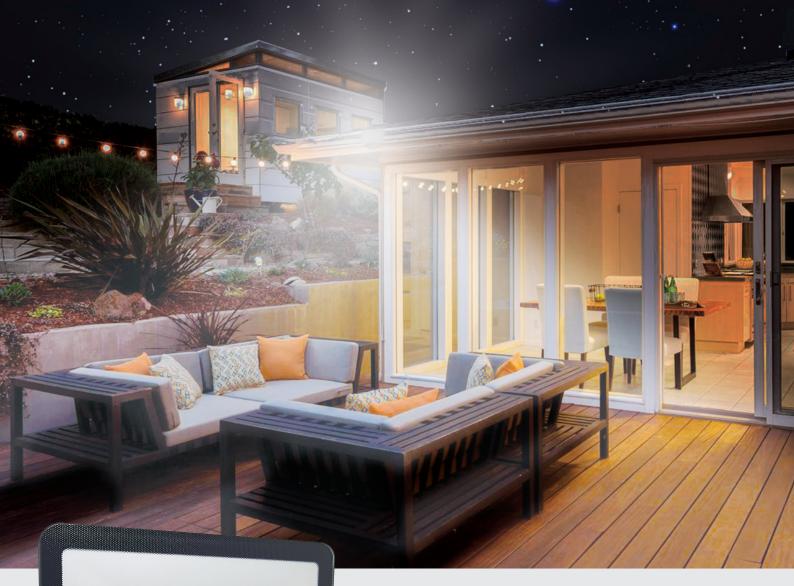

1SP SPF10WB LED light with motion detector 10W, white color - IP54



1SP SPF10WN LED light with motion detector 10W, black color - IP54



1SP SPF20WB LED light with motion detector 20W, white color - IP54




1SP SPF20WN LED light with motion detector 20W, black color - IP54



Power supply	230V ÷10% 50Hz
LED power:	10W - 750 lumen (1SP SPF10WB, 1SP SPF10WN)
	20W - 1500 lumen (1SP SPF20WB, 1SP SPF20WN)
Light color temperature:	cool 5.000 K ±250K
Wall mounting	1,8 ÷ 2,4 m from ground level
Detection angle	110° - motion detector can be rotated of 60° horizontally
	and 90° vertically together with the led light
Detection distance	max 8 m (wall installation at 2 m)
Light setting	30 ÷ 200 Lux
Timing setting	8 seconds ÷ 12 minutes
Working temperature	-10 ÷ +40 °C
Protection degree	IP54

120 x 47,5 x 125 mm (1SP SPF10WB, 1SP SPF10WN)

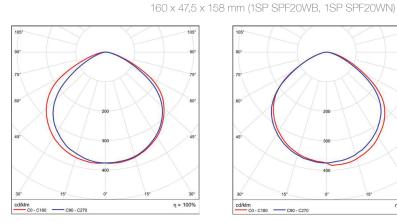


Dimensions (LxWxH)


Photometric curve 1SP SPF10W*

Photometric curve 1SP SPF20W*

η = 100%



cd/kl





PERRY ELECTRIC s.r.l. Via Milanese, 11 22070 Veniano - CO - ITALY T. +39 031 8944.1 Fax +39 031 931848 www.perry.it - export@perry.it





ACCESSORIES



1PA SS01 Watertight box for 1SP SPF10W * and 1SP SPF20W * wiring - IP65